


Mito sospeso 60 var trimless datasheet

Annular LED suspended luminaire with double-sided light emission and a diameter of 60 cm. There is a choice of two lighting effects. table (wide) for use over tables – wide light beam downwards and upwards. room (narrow) for freely suspended luminaire lighting – concentrated light beam directed downwards, diffused light directed upwards. The suspension length is continuously adjustable from 50 to 200 cm.

Version with plastering element to be fitted flush with the ceiling in a hollow ceiling, and with integrated power supply unit; connection to 230 V AC mains voltage. Can be controlled via »touchless control« (on the head) and Occhio air; alternatively, dimmable via a trailing-edge phase cut dimmer*. The color temperature can be continuously controlled via »touchless control« or Occhio air from 2700 to 4000 K or can be preset (2700/3000/3500/4000 K).

Other versions: Mito soffitto flat (20/40/60), Mito soffitto up (20/40/60), Mito sospeso flat (40/60), Mito sospeso up (40/60), Mito sospeso trimless (40), Mito sospeso due (40/60)

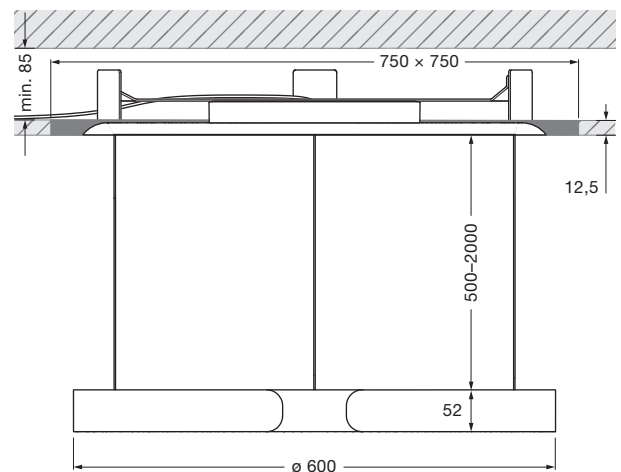

incl. power supply unit (removable)

dimensions in mm

technical data Mito sospeso 60 var trimless

| | | |
|-------------------------|-------------------------------------|---|
| properties | material | aluminium, painted, anodised or PVC-coated steel, plastic, optical silicone |
| | height adjustment | 500–2000 mm |
| | weight (luminaire + mounting plate) | 6.0 kg + 5.25 kg |
| surface | head | bronze, matt gold, rose gold, matt silver, matt white, matt black |
| | canopy | matt white |
| Occhio »color tune« LED | average life time | > 50.000 hrs |
| | energy efficiency class | A+ |
| | power | 60 W |
| | color rendering index | high color; CRI Ra 95 |
| | color temperature | 2700–4000 K |
| | recommended use | residential and commercial |
| electricity | dimming | »touchless control« and Occhio air (optional) or via trailing-edge phasecut dimmer* |
| | connection | 230 V AC |
| | permitted operating conditions | max. 30°C for indoor use only |

* For a list of compatible dimmers, see www.occhio.de/dim_en, trailing-edge phasecut dimmer and Occhio air not combinable



Mito sospeso 60 var trimless lighting effects

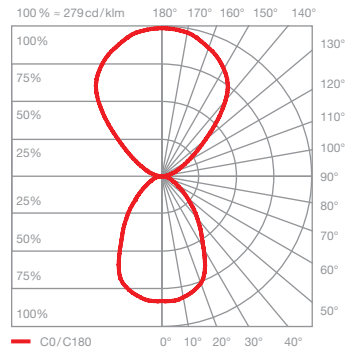




table (wide)

wide light beam (up and down), beam angle approx. 80° (down)

inserts: wide / flood

luminous flux: high color 60W 3330lm

UGR (4H8H) < 19

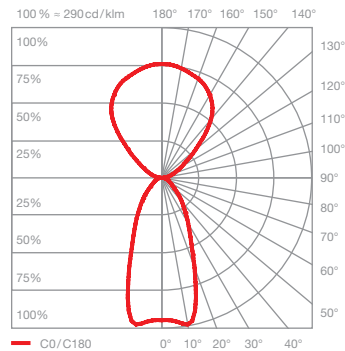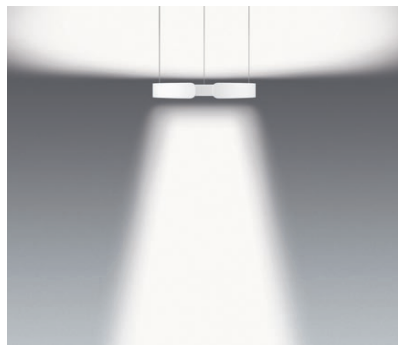

room (narrow)

concentrated light downwards, beam angle approx. 50°, diffuse upwards

inserts: narrow / diffuse

luminous flux: high color 60W 3210lm

UGR (4H8H) < 19