



**SPALYS34**  
Design by Ryosuke Fukusada


Collection consisting of aluminium suspended lamps.  
Available in several colours and sizes.

Typology: SUSPENSION LAMP

Ratings

- Built in line voltage **LED** module
- CCT 3000 K
- Downlight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off dimmable trailing edge
- Die cast aluminium body, painted
- Opalescent diffuser


Product code composition

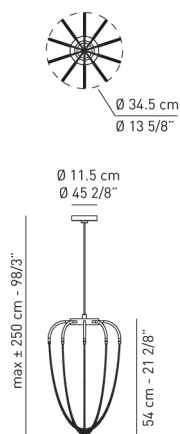

ALYSOID				
Type	Article	Colours	Catene / chains	Source
SP	ALYS 34	AN anthracite grey wrinkled	NI black polished nickel	LED 20W - diffused beam 3000K
			OT natural brass	

IP20 CRI90 220-240VAc **LED** ~1203 lm 60 lm/W  
 example composition code | SP | ALYS34 | AN | OT | LED

Available colors



CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

SPALYS34AN\_\_LED \_\_\_\_\_

NOTICE:  
Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources.  
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.