

Installation instructions

A, Introduction

- Before you go in any manipulation with the appliance, please read carefully this direction, and observe all instructions and recommendations!
- The lighting assembly must be made with more persons than one.
- It is forbidden to use the product for the purpose other than intended, and contrary to this direction, and that for safety reasons and for the reason of the guarantee termination.
- Switch off power at main circuit panel prior to installation!
- Any electric installation, including putting the appliance into operation, may be performed by a qualified electrician only.
- Prevent children and persons with lowered sensual and mental capabilities to manipulate with the lighting fitting since the product consists of tiny and fragile components that may be dangerous for them at manipulation or in case of ingestion.
- The manufacturer assumes no liability for damage resulting from incorrect installation.
- The pendant light is intended for the illumination of interior or home accommodation.


B, Product name: Pendant Disc

- The pendant Disc is available in one sizes in dimensions as indicated below.
- Dimensions of lamp shades might vary slightly due to manual way of manufacturing.
- The product is intended for the illumination of interior (dry environment only).

C, Components included with unit:


- Hand-blown crystal lamp shade
- Metal ceiling mount
- Installation Instructions, Letter of guarantee
- Cleaning and Maintenance Manual
- Gloves

Light source and fixing material are not part of the lighting fixture kit.

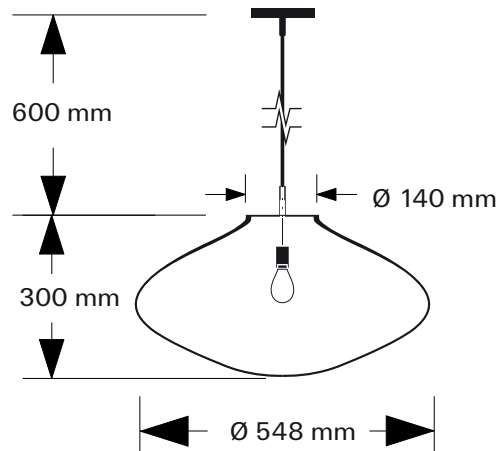

D, Assembly and Disassembly - connecting to and disconnecting from the network

- After unpacking, first of all, check for damage during the transport and for completeness, see pic.1. If anything is wrong, contact your dealer immediately since later complaint for the above reasons would not be accepted.
- Perform the assembly of the appliance with the use of schematic drawing, respecting that the electric installation and connection to the network may be performed by an electrician with proper qualifications only, while observing general regulations as well.
- Do not remove the protective film on the crystal part (10) until you finish the installation.
- Insert the steel thin cable (2) into the anchor plate (1).
- Insert the anchor plate (1) on the supply conductor leading from the ceiling and fix it using wall plugs (3) and screws (4). There are not included, please select the size and type of material under the ceiling and light weight.
- On the thin cable (2) insert the ceiling cover (5) and fix it to the anchor plate (1) using the screw. Insert the end of the thin cable (2) into the clamp (6) of the set (7).
- Loosen the screw near the cover (5) and let it down. Insert the conductor (8) through the cover (5), do the electric installation and fix the cover on the anchor plate (1) by tightening the screw. Loosen the screw of the lid (9).
- Put the power supply on the bulb sleeve and insert the glass lamp shade (10). Fix the lid (9) by tightening the screw.
- Remove the protective film from the coating crystal part (10) after the installation.
- Use the fine gloves made of cloth when cleaning a maintaining the pendant light. Especially do not touch coating crystal surface without gloves. You avoid the formation of imprints and loss of gloss.
- At disassembly, first switch the lighting fitting off, and disconnect it from the power.
- Then you may proceed in a similar way, in the opposite order than at the assembly.
- Any transport of the appliance later should be performed either in the original wrap or similar in order to avoid damage.
- Technical support: info@bomma.cz

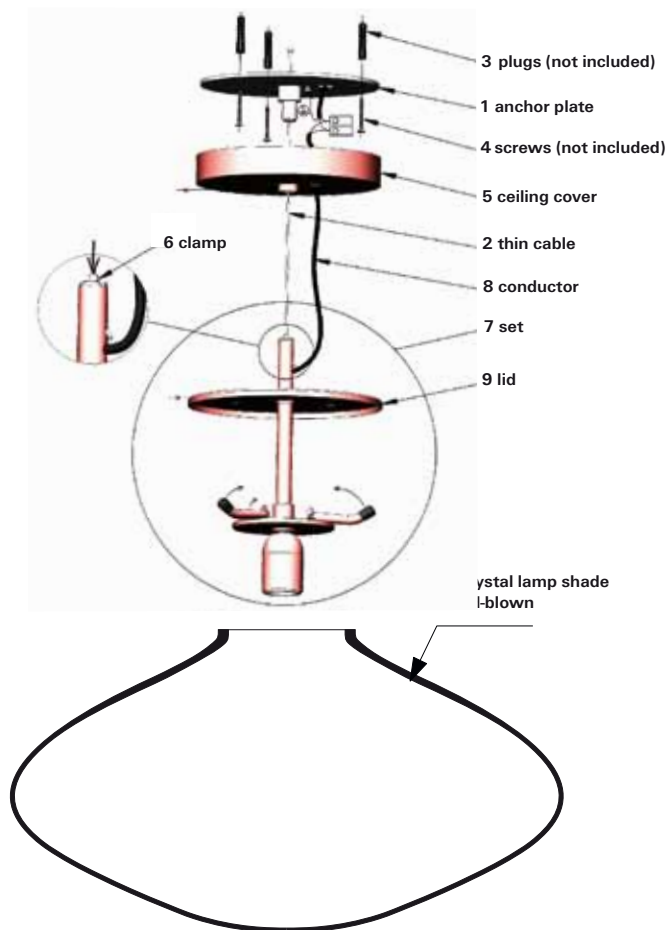

E, Technical specification, purpose

- Nominal voltage: 250 V/ A.C. 50Hz
- Protection: IP 20
- Nominal input: 1x 40 W (E27)
- Weight of crystal part : approx. 9 kg
- Třída: II.

Recommended energy - saving LED E27.

F, Liquidation

After the end of the technical life span of the appliance, before its liquidation, disconnect it from the electric cord, dismount it and separate the individual parts. The sorted out waste material should be delivered to the organization authorized to liquidate

ID	Category	Title
10 11 11*	N	Small particles of waste glass and glass powder containing heavy metals included PbO
10 11 12	O	Waste glass other than no. 10 11 11 (sodium-potassium glass)
17 04 01	O	Copper, bronze, brass
17 04 05	O	Iron and steel
20 01 01	O	Paper and pasteboard
15 01 05	O	Package with plastic insert

Bohemia Machine s.r.o.
Zámecká 1177
58291 Světlá nad Sázavou
Czech Republic

+420 569 453 149
info@bomma.cz
www.bomma.cz