

Installation instructions

A, Introduction

- Before you go in any manipulation with the appliance, please read carefully this direction, and observe all instructions and recommendations!
- The lighting assembly must be made with more persons than one.
- It is forbidden to use the product for the purpose other than intended, and contrary to this direction, and that for safety reasons and for the reason of the guarantee termination.
- Switch off power at main circuit panel prior to installation!
- Any electric installation, including putting the appliance into operation, may be performed by a qualified electrician only.
- Prevent children and persons with lowered sensual and mental capabilities to manipulate with the lighting fitting since the product consists of tiny and fragile components that may be dangerous for them at manipulation or in case of ingestion.
- The manufacturer assumes no liability for damage resulting from incorrect installation.
- The pendant light is intended for the illumination of interior or home accommodation.


B, Product name: Pendant Tied Up Romance

- The pendant Tied Up Romance is available in one size as indicated below.
- The pendant Tied Up Romance is available in three type of harness.
- The lamp shade is hand-blown from clear crystal material.
- The product is intended for the illumination of interior (dry environment only).

C, Components included with unit


- Hand-blown crystal lamp shade
- Ceiling mount available in comaxit black
- harness, leather belt
- Installation Instructions, Letter of guarantee
- Cleaning and Maintenance Manual, Gloves

Light source and fixing material are not part of the lighting fixture kit.

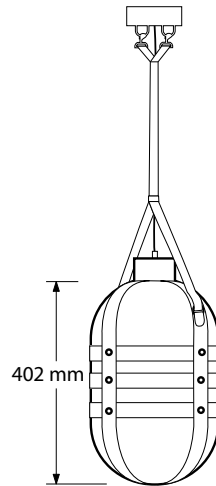


01

pendant
type A

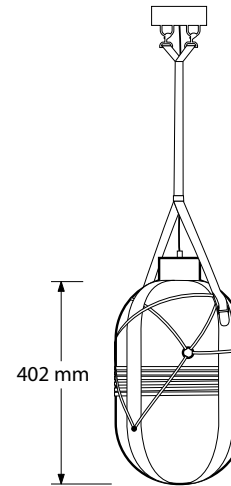

02

pendant
type B

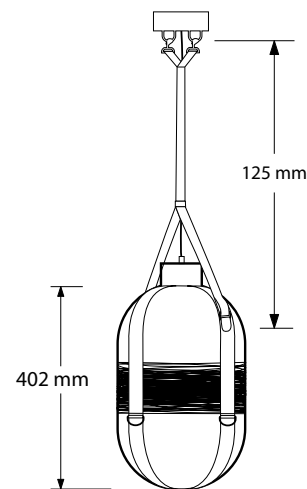

03

pendant
type C

D, Assembly and Disassembly - connecting to and disconnecting from the network.

• After unpacking, first of all, check for damage during the transport and for completeness, see pic. 1. If anything is wrong, contact your dealer immediately since later complaint for the above reasons would not be accepted.


• Perform the assembly of the appliance with the use of schematic drawing, respecting that the electric installation and connection to the network may be performed by an electrician with proper qualifications only, while observing general regulations as well.

• Insert the conductor (4) leading from the ceiling into the anchor plate (1).
• Attach to the anchor plate (1) to the ceiling using wall plugs and screws (3). There are not included, please select the size and type of material under the ceiling and light weight.

• Unfix (turn) the cable tube (5).
• Adjust the length of leather belt (9) by using the bell screw (8). Maximum length is 2 m.
• Take the el. cable (10) together with leather belt (9) and crystal part (14) with harness (13) and connect the leather belt together with loops (6) and buckles (12)
• Insert the el. cables (10) and the el. conductor (4) through the cover (2) and do the electric installation by qualified electrician.
• Pull up the cover (2) and fix it by turning cable tube (5).
• The cover (2) screw with decorative nuts (7).
• Put the power supply on the bulb sleeve (11). Use the appropriate source on the bulb sleeve. In order to put a new bulb into a lighting fixture's socket, turn the bulb in a clockwise direction.

• At disassembly, first switch the lighting fitting off, and disconnect it from the power.
• Then you may proceed in a similar way, in the opposite order than at the assembly.
• Any transport of the appliance later should be performed either in the original wrap or similar in order to avoid damage.

• Technical support: info@bomma.cz

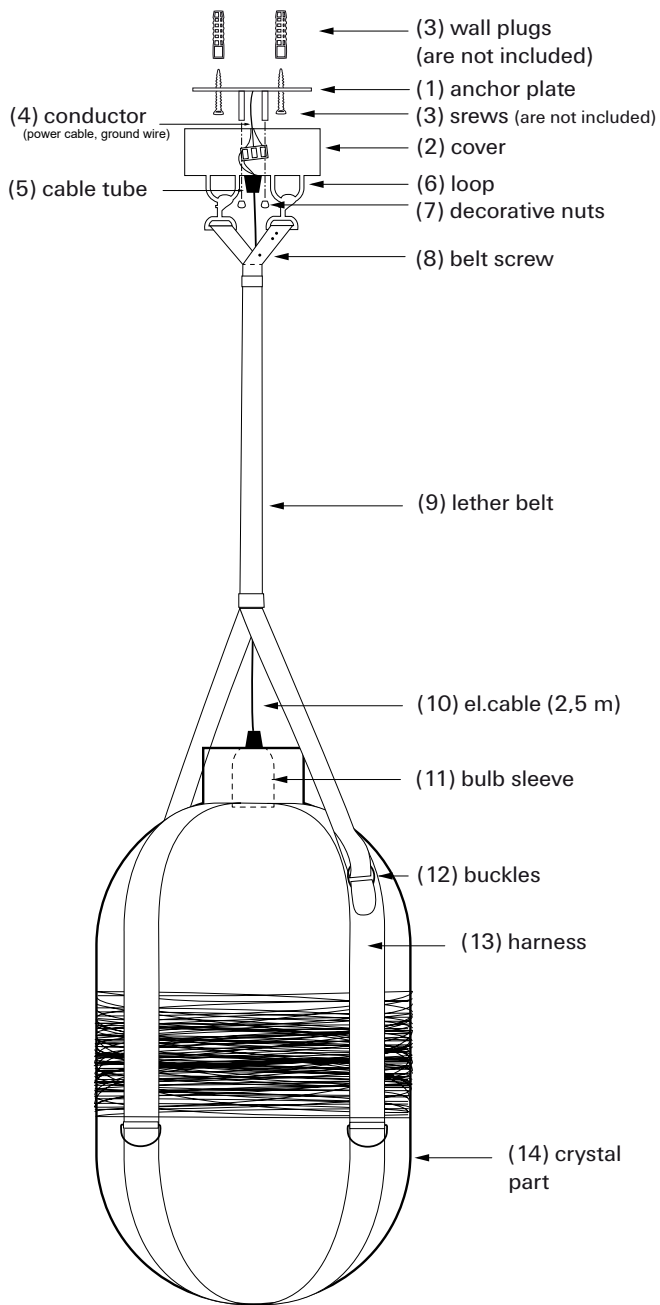


E, Technical specification, purpose

- Nominal voltage: 250 V/ A.C. 50Hz
- Protection: IP 20
- Nominal input: 1x 40 W (E27)
- Class: I.
- Weight of crystal part (approx.) 4,9 kg

Recommended energy - saving LED E27.

lamp

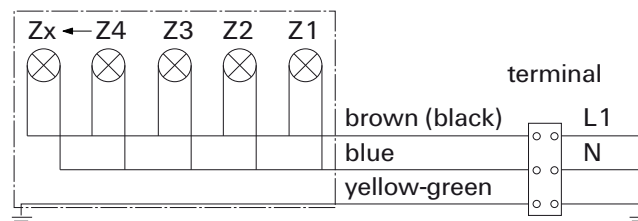

Connect to the lighting circuit through the lighting terminal corresponding to the nominal current of the lamp.

F, Liquidation

After the end of the technical life span of the appliance, before its liquidation, disconnect it from the electric cord, dismount it and separate the individual parts. The sorted out waste material should be delivered to the organization authorized to liquidate

| ID | Category | Title |
|-----------|----------|--|
| 10 11 11* | N | Small particles of waste glass and glass powder containing heavy metals included PbO |
| 10 11 12 | O | Waste glass other than no. 10 11 11 (sodium-potassium glass) |
| 17 04 01 | O | Copper, bronze, brass |
| 17 04 05 | O | Iron and steel |
| 20 01 01 | O | Paper and pasteboard |
| 15 01 05 | O | Package with plastic insert |

pic. 1

Bohemia Machine s.r.o.
Zámecká 1177
58291 Světlá nad Sázavou
Czech Republic

+420 569 453 149
info@bomma.cz
www.bomma.cz

