



Divo faro doppio mains voltage halogen

Ceiling lamp - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Ceiling lamp Occhio Divo doppio consisting of

body Occhio faro doppio - different length and surfaces
 head Occhio Divo - different lighting effects and surfaces
 Occhio accessories - different mounting options and surfaces

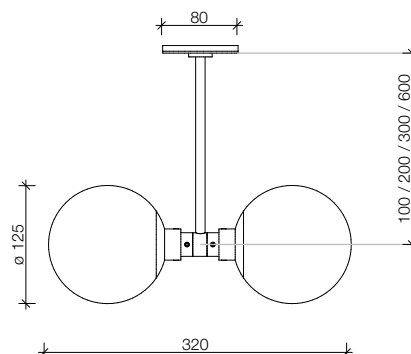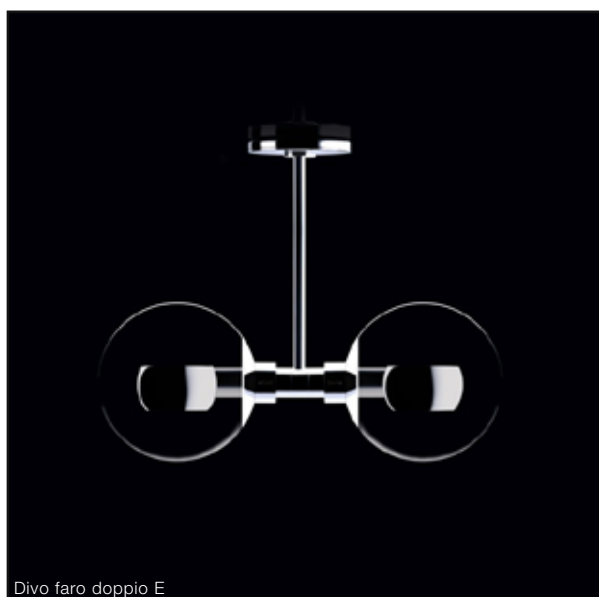

material

aluminium, brass, steel, glass

surface

head: chrome, chrome matt
 body: chrome, chrome matt

length / rotation angle

10 cm, 20 cm, 30 cm, 60 cm / 360°

recommended lighting effects

B, C, E see p.2 cutsheet

light source

mains voltage halogen, QT 18, operating voltage 230 V
 2 x 60 / 70 W, B15d Eco,
 energy efficiency grade C, lifetime 2.000 h

luminous flux (bulb)

60 W / 980 lm, 70 W / 1180 lm

color temperature / color rendering

2900 K / CRI 100


weight

body and reflector head max. 1,3 kg

mounting accessories

for surface or recessed mounting, see p.3 cutsheet

Divo faro doppio recommended lighting effects


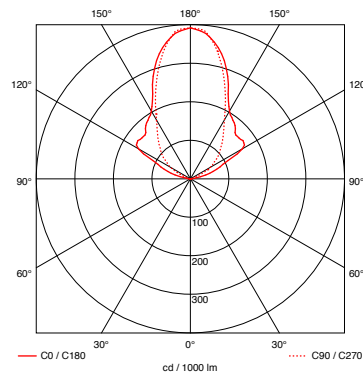


Divo B
reflector head for light with wide radiation to one side

with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head
clear glass 69%
satinised glass 66%

material / surface
clear or satinised, heat-resistant glass
reflector aluminium
fixture chrome matt or chrome

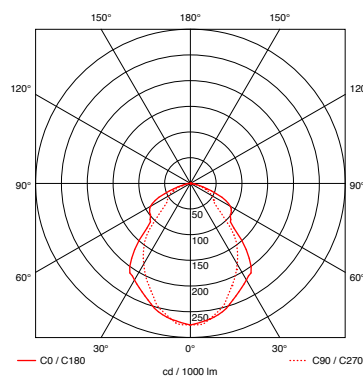
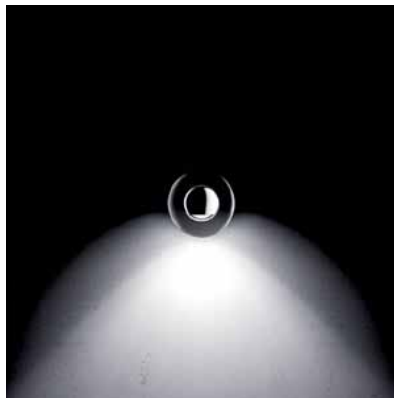


Divo C
reflector head for light with narrow radiation to one side

with satinised glass, the light output varies compared to the illustrations shown

efficiency of reflector head
clear glass 54%
satinised glass 52%

material / surface
clear or satinised, heat-resistant glass
reflector aluminium
fixture chrome matt or chrome

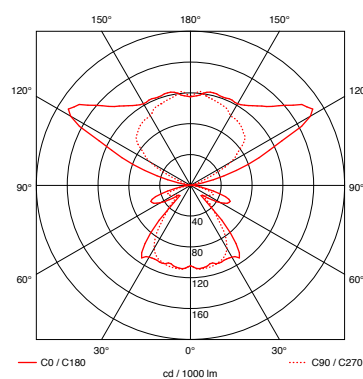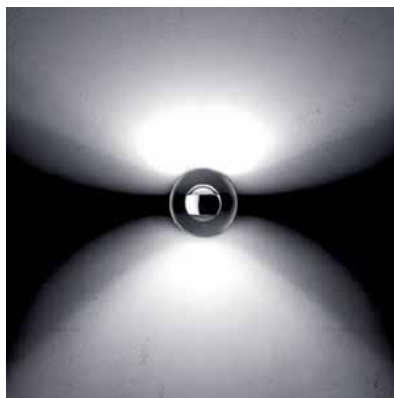

Divo E
reflector head for light with wide radiation to one and narrow radiation to the other side


with satinised glass the light output varies compared to the illustrations shown

efficiency of reflector head
clear glass 79%
satinised glass 77%




material / surface
clear or satinised, heat-resistant glass
reflector aluminium
fixture chrome matt or chrome

Divo faro doppio Item numbers



Item number
_chrome matt M
_chrome C

<p>faro doppio</p> 	<p>max. 2 x 70W mains voltage halogen B15d turnable</p>	<table border="1"> <tr> <td>10 cm</td> <td>8F 20 00 _</td> </tr> <tr> <td>20 cm</td> <td>8F 21 00 _</td> </tr> <tr> <td>30 cm</td> <td>8F 22 00 _</td> </tr> <tr> <td>60 cm</td> <td>8F 24 00 _</td> </tr> </table>	10 cm	8F 20 00 _	20 cm	8F 21 00 _	30 cm	8F 22 00 _	60 cm	8F 24 00 _
10 cm	8F 20 00 _									
20 cm	8F 21 00 _									
30 cm	8F 22 00 _									
60 cm	8F 24 00 _									



<p>Divo B</p> 	<p>clear glass</p> <p>satinised glass</p>	<table border="1"> <tr> <td>8K 00 B1 M</td> </tr> <tr> <td>8K 00 B1 C</td> </tr> <tr> <td>8K 00 B2 M</td> </tr> <tr> <td>8K 00 B2 C</td> </tr> </table>	8K 00 B1 M	8K 00 B1 C	8K 00 B2 M	8K 00 B2 C
8K 00 B1 M						
8K 00 B1 C						
8K 00 B2 M						
8K 00 B2 C						
<p>Divo C</p> 	<p>clear glass</p> <p>satinised glass</p>	<table border="1"> <tr> <td>8K 00 C1 M</td> </tr> <tr> <td>8K 00 C1 C</td> </tr> <tr> <td>8K 00 C2 M</td> </tr> <tr> <td>8K 00 C2 C</td> </tr> </table>	8K 00 C1 M	8K 00 C1 C	8K 00 C2 M	8K 00 C2 C
8K 00 C1 M						
8K 00 C1 C						
8K 00 C2 M						
8K 00 C2 C						
<p>Divo E</p> 	<p>clear glass</p> <p>satinised glass</p>	<table border="1"> <tr> <td>8K 00 E1 M</td> </tr> <tr> <td>8K 00 E1 C</td> </tr> <tr> <td>8K 00 E2 M</td> </tr> <tr> <td>8K 00 E2 C</td> </tr> </table>	8K 00 E1 M	8K 00 E1 C	8K 00 E2 M	8K 00 E2 C
8K 00 E1 M						
8K 00 E1 C						
8K 00 E2 M						
8K 00 E2 C						



<p>flat box</p> 	<p>for plastering or wall / ceiling box h 8 mm, ø 80 mm</p>	<table border="1"> <tr> <td>8Z 00 00 _</td> </tr> </table>	8Z 00 00 _	
8Z 00 00 _				
<p>spacing box</p> 	<p>for surface mounting h 22 mm, ø 80 mm</p> <p>with hole for external cable supply h 22 mm, ø 80 mm</p>	<table border="1"> <tr> <td>8Z 01 00 _</td> </tr> <tr> <td>8Z 03 00 _</td> </tr> </table>	8Z 01 00 _	8Z 03 00 _
8Z 01 00 _				
8Z 03 00 _				