


Più alto² NV cutsheet

The Più lighting system includes recessed mounted spotlights (piano and piano in), surface mounted spotlights (alto and alto²) and track lights.

Thanks to a special attachment technique Più alto and alto² spotlights are rotatable 360° and pivotable 45° thanks to a hidden joint. However they can also be fixed in a vertical position for downlight use only.

The various optical components (inserts) can be exchanged and reassembled at any time using a simple mechanism.

The Occhio 'Smart Source' concept offers a free choice of the 4 lightsources: mains voltage halogen (HV), low voltage halogen (NV), metal halide halogen (CDM) and „next generation“ LED.

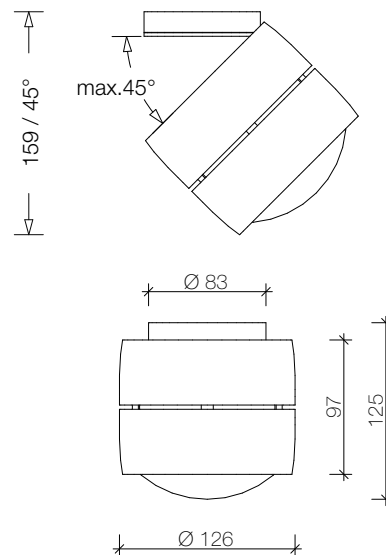

materials light fixture
aluminium, brass, steel
chrome-plated or
painted

materials inserts
optical plastic, glass

surface head
chrome, matt chrome,
glossy black (nero),
matt black,
glossy white (bianco),
matt white

surface body
chrome, matt chrome

rotation body
360°

movability head
45° (with stop)

weight
max. 1,2 kg

lighting effects
see cutsheet page 2f

dimming function
with trailing edge phase
dimmer

ECG (transformer)
integrated
operating voltage
230 V AC



lighting source NV

power	P	60 W	50 W
luminous flux	ø	1650 lm	1180 lm
efficiency	η	28 lm/W	24 lm/W
voltage	U	12 V	
average lifetime	t	4000 h	

color temperature	T	3000 K
color rendering index	CRI	Ra 100
efficiency class	EEC	B
socket		GY6.35
Osram item		Halostar Eco

recommended usage
residential and
public



Più alto² lighting effects CDM

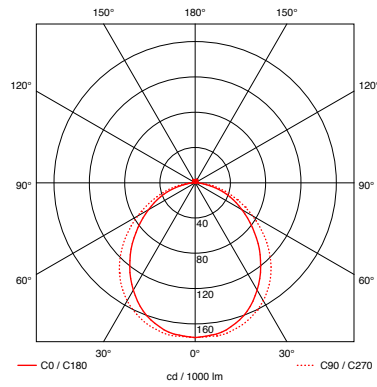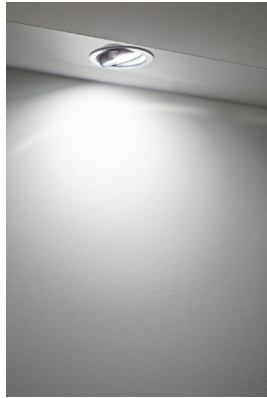

Più B

diffused light
luminous efficiency approx. 49%


insert: satinised glass

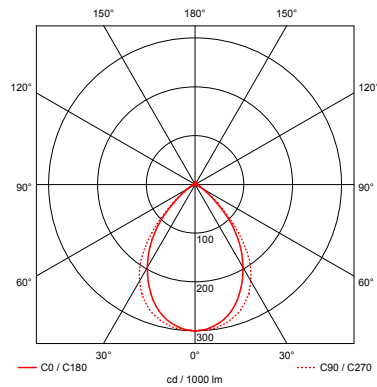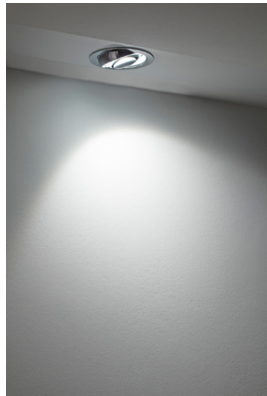

Più C with satinised glass

scattered light
with soft widening of beam angle
luminous efficiency approx. 53 %
beam angle approx. 90°

insert: satinised glass
 lens


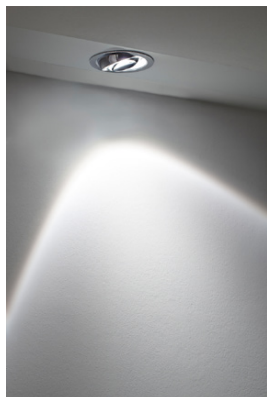


Polardiagramm similar to Più C

Più C with soft edge glass

directed light
with soft contour of the beam angle
luminous efficiency approx. 54 %
beam angle approx. 80°

insert: soft edge glass
 lens

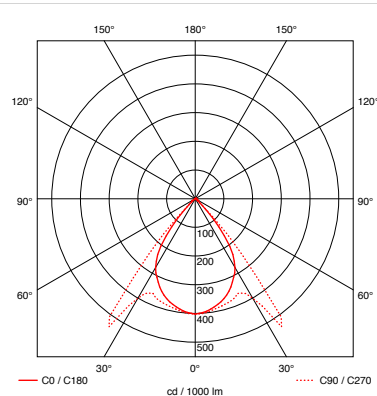
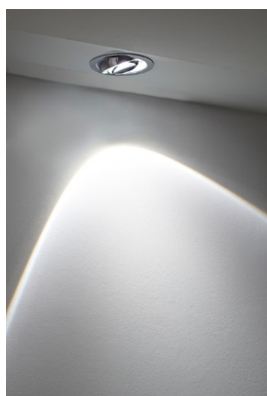


Più C

directed light
luminous efficiency approx. 59 %
beam angle approx. 80°

insert: lens



Più alto² lighting effects CDM

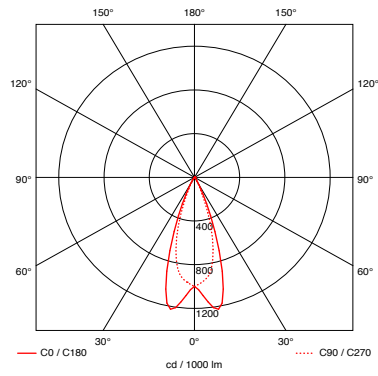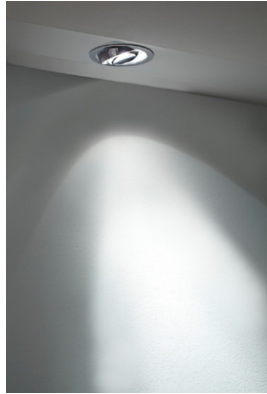

Più S 40

directed light
luminous efficiency approx. 45 %
beam angle approx. 40°



insert: aluminium reflector
soft edge glass

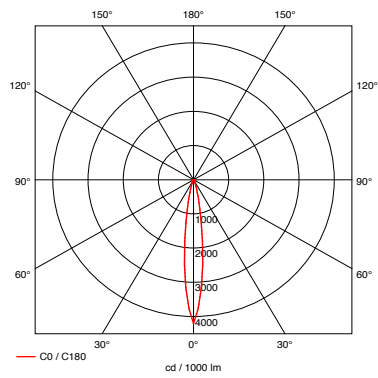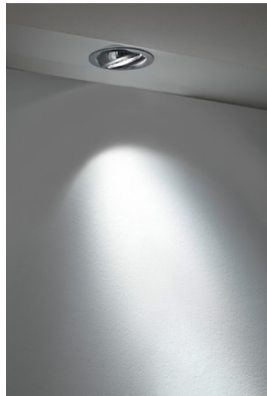

Più S 20

directed light
luminous efficiency approx. 45 %
beam angle approx. 20°

insert: aluminium reflector
soft edge glass

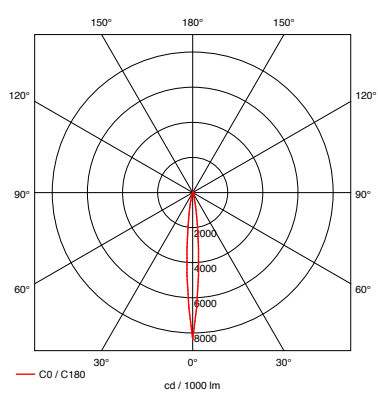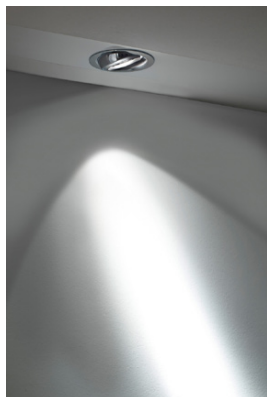

Più S 10



directed light
luminous efficiency approx. 45 %
beam angle approx. 10°

insert: aluminium reflector
soft edge glass

Più alto² NV

color code

complete article number with
color code: __





















base — 
head — 

C	C	base	head
M	M	chrome	chrome
C	B	matt chrome	matt chrome
M	W	chrome	glossy white (bianco)
C	N	matt chrome	matt white
M	S	chrome	glossy black (nero)
S		matt chrome	matt black

NV halogen

low voltage halogen Eco GY6.35

max. 60 W (excl. bulb), electr. transformer integrated

head	Più alto ² NV	article no.
B 	B  satinised glass diffuse	1A 22 79 __ please add color code
C 	C  lens 80°	1A 22 78 __
S 40 	S 40  spot reflector with soft edge glass 40°	1A 22 74 __
S 20 	S 20  spot reflector with soft edge glass 20°	1A 22 72 __
S 10 	S 10  spot reflector with soft edge glass 10°	1A 22 71 __
inserts optional	 filter red  filter green  filter blue  filter yellow  filter magenta	8K 60 2R 8K 60 2G 8K 60 2B 8K 60 2Y 8K 60 2M
		 satinised glass  soft edge glass only for version C
light source + don't forget to order	 NV halogen Eco GY6.35 12V/50W  NV halogen Eco GY6.35 12V/60W	5G 00 50 C 5G 00 60 C
accessories	 loop-in loop-out wiring set	1Z 22 80