


Più alto track HV cutsheet

The Più lighting system includes recessed mounted spotlights (piano and piano in), surface mounted spotlights (alto and alto²) and track lights.

Più alto² track lights are rotatable 355° and pivotable 45° thanks to a hidden joint. However they can also be fixed in a vertical position for downlight use only.

The various optical components (inserts) can be exchanged and reassembled at any time using a simple mechanism.

The Occhio 'Smart Source' concept offers a free choice of the 4 lightsources: mains voltage halogen (HV), low voltage halogen (NV), metal halide halogen (CDM) and „next generation“ LED.

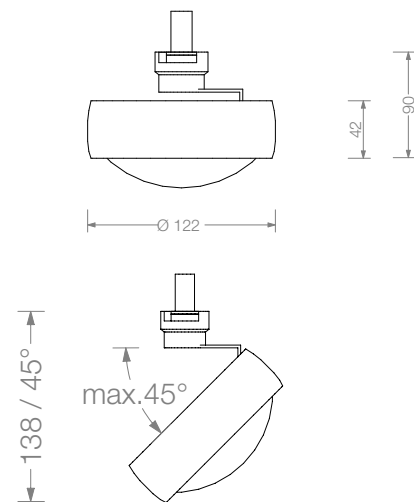

materials light fixture
aluminium, brass, steel
chrome-plated or
painted

materials inserts
optical plastic, glass

surface head
chrome, matt chrome,
glossy black (nero),
matt black,
glossy white (bianco),
matt white

finish body
chrome, matt chrome

finish adapter
black, white, silver

rotation body
355° (with stop)

movability head
45° (with stop)

weight
max. 0,7 kg

lighting effects
see cutsheet page 2

dimming function
with standard trailing- or
leading-edge dimmers

ECG
not necessary
operating voltage
230 V AC



light source HV

power	P	60 W	48 W
luminous flux	ø	980 lm	740 lm
efficiency	η	16 lm/W	15 lm/W
average lifetime	t	2000 h	

color temperature	T	2800 K
color rendering index	CRI	Ra 100
efficiency class	EEC	D
socket		G9
Osram item		Halopin Eco

recommended usage residential



Più alto track lighting effects HV

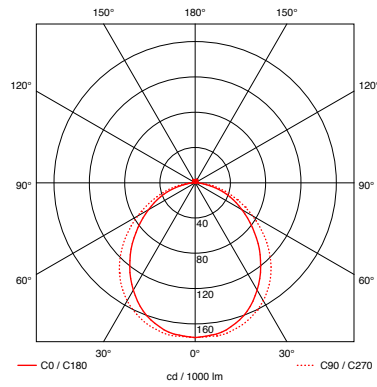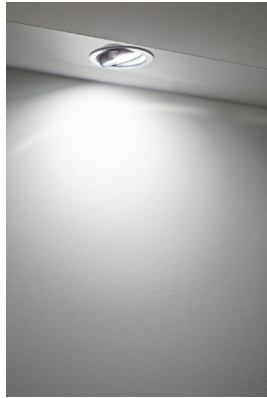

Più B

diffused light
luminous efficiency approx. 49%


insert: satinised glass

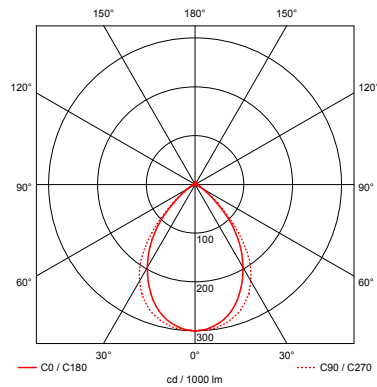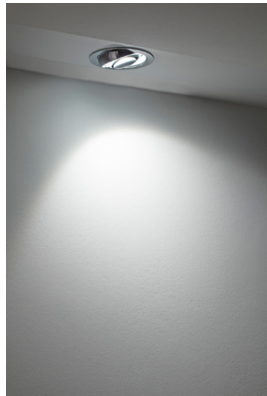

Più C with satinised glass

scattered light
with soft widening of beam angle
luminous efficiency approx. 53 %
beam angle approx. 90°

insert: satinised glass
 lens


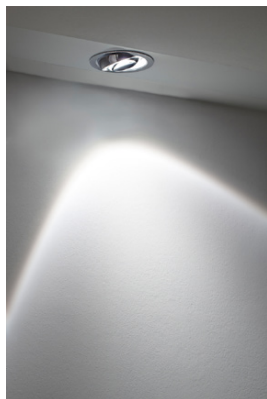


Polardiagramm similar to Più C

Più C with soft edge glass

directed light
with soft contour of the beam angle
luminous efficiency approx. 54 %
beam angle approx. 80°

insert: soft edge glass
 lens

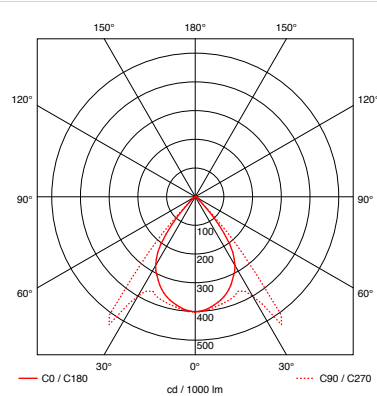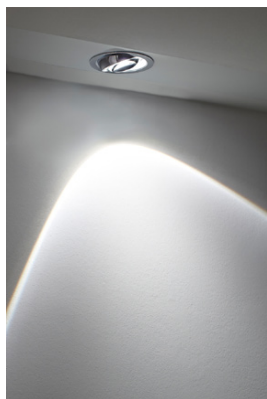

Più C


directed light
luminous efficiency approx. 59 %
beam angle approx. 80°

insert: lens

Più alto track HV article numbers

color code

complete article number with
color code: __













track adapter — 
body —
head —

	body	head	track adapter
<u>C</u> <u>C</u> <u>W</u>	chrome	chrome	white
<u>M</u> <u>M</u> <u>M</u>	matt chrome	matt chrome	silver
<u>C</u> <u>B</u> <u>W</u>	chrome	glossy white (bianco)	white
<u>M</u> <u>W</u> <u>W</u>	matt chrome	matt white	white
<u>C</u> <u>N</u> <u>S</u>	chrome	glossy black (nero)	black
<u>M</u> <u>S</u> <u>S</u>	matt chrome	matt black	black

HV halogen

mains voltage halogen Eco G9

max. 60W (excl. bulb),
incl. 3-phase adapter

head	Più alto track HV		article no.	
B 	B 	satinised glass diffuse	1A1389 ___ please add color code	
C 	C 	lens 80°	1A1388 ___	
inserts optional	 filter red  filter green  filter blue  filter yellow  filter magenta	8K602R 8K602G 8K602B 8K602Y 8K602M	 satinised glass  soft edge glass only for version C	8K6040 8K6035
light source + don't forget to order		HV halogen Eco G9 48 W HV halogen Eco G9 60 W	5D0048 C 5D0060 C	
!	Più alto track spotlight also available for 1 track phase version, item no. 1A_____1			