
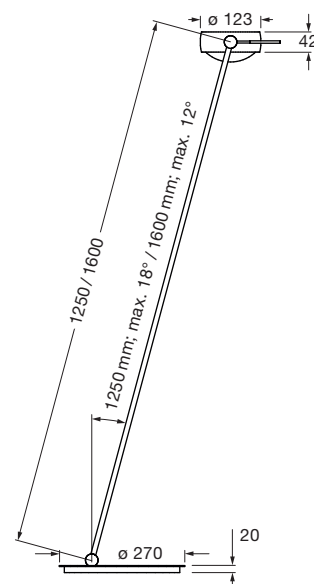


Sento lettura datasheet

LED floor luminaire, connection via power supply unit (converter) with wall plug. Modular LED head-body-system allows free combination of different surfaces of head, body and base. Removable head for configuration and maintenance purposes, LED changeable. Heads available with one sided or double sided light output, power of light source 18W.

Lighting effect changeable by using optional inserts, dichroic color filters can be added. Adjustment via heat-decoupled carbon pin (fixation of head against rotation optional). Switch- and dimmable via »touchless control« with gestures at the head.

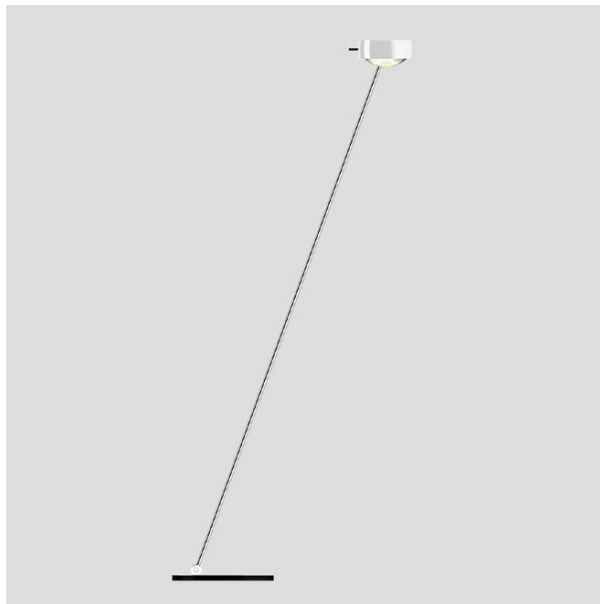

dimensions in mm



technical data Sento lettura

properties	material	aluminium, steel chrome-plated, painted or anodised, plastic, glass, optical plastic		
	length	1250 / 1600 mm		
	rotation head	360°		
	swivel range	1250 mm; max. 18° / 1600 mm; max. 12°		
	weight	8.5 kg		
surface	head	matt gold, rose gold, bronze, chrome, matt chrome, glossy white, matt white, glossy black, matt black		
	body	matt white, matt black, chrome, matt chrome		
	base	chrome, glossy white, matt chrome, matt white, glossy black, matt black		
	cable	matt white, matt black, transparent		
Occhio LED	average life time	> 50.000 hrs		
	energy efficiency class	A+ / A		
	power	18 W		
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85	
	color temperature	2700, 3000 K	3000, 3500, 4000 K	
recommended use	residential and public	public		
electricity	dimming	»touchless control« and Occhio air (optional)		
	power supply plug unit	with integrated converter, cable length 180 cm, for use with 230 V AC		
	permitted operating conditions	max. 30°C for indoor use only		



Sento lettura lighting effects

 head single sided

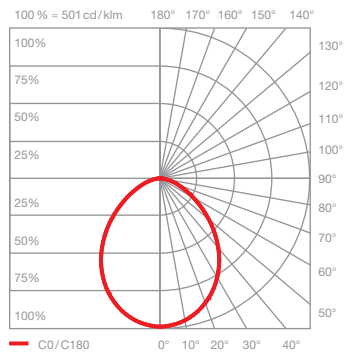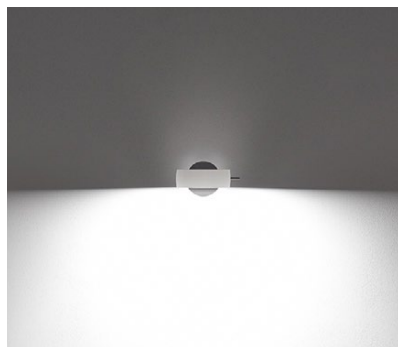


Sento B

diffuse light

insert: diffusor glass

luminous flux: perfect color 18W 1000lm
high flux 18W 1370lm


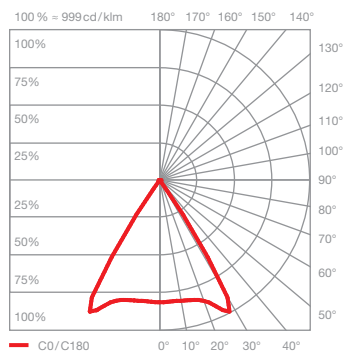


Sento C

directed light
beam angle approx. 80°

insert: lens

luminous flux: perfect color 18W 1140lm
high flux 18W 1570lm

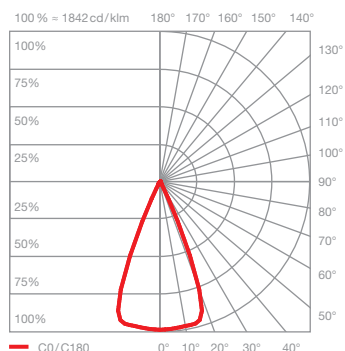
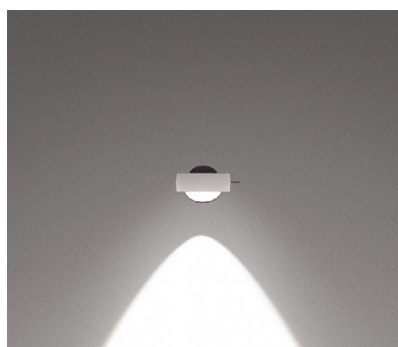


Sento S40

directed light
beam angle approx. 40°

insert: spot lens, lens
soft edge glass

luminous flux: perfect color 18W 1130lm
high flux 18W 1560lm

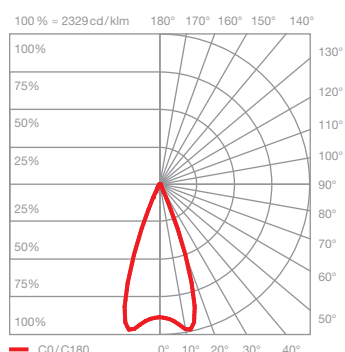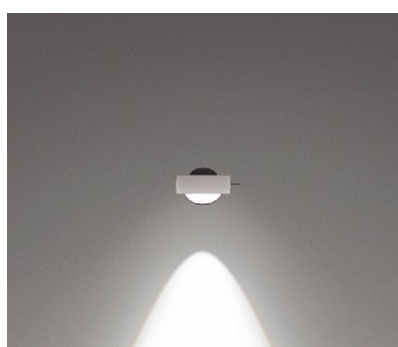


Sento S30



directed light
beam angle approx. 30°

insert: spot lens, lens
fresnel lens

luminous flux: perfect color 18W 1110lm
high flux 18W 1530lm

Sento lettura lighting effects

 head double sided

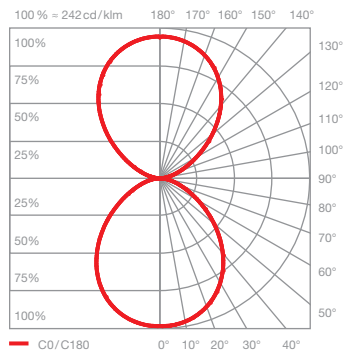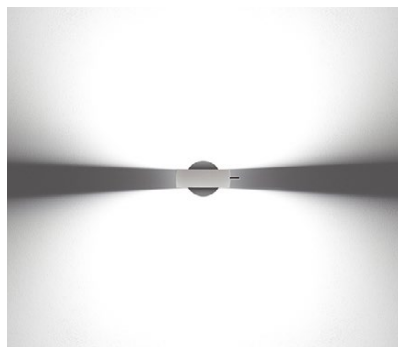


Sento A

diffuse light in both directions

insert: diffusor glass
diffusor glass

luminous flux: perfect color 18W 1090lm
high flux 18W 1500lm


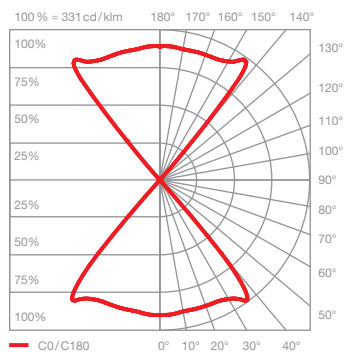


Sento D

directed light in both directions
beam angle approx. 80°

insert: lens
lens

luminous flux: perfect color 18W 1270lm
high flux 18W 1750lm

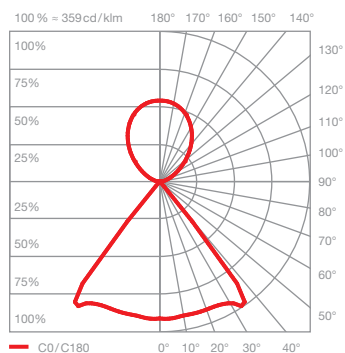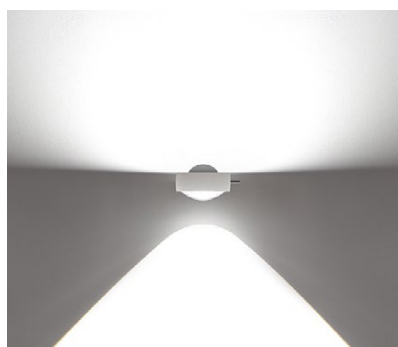

Sento E

diffuse up light
directed down light
beam angle approx. 80°

insert: diffusor glass
lens

luminous flux: perfect color 18W 1170lm
high flux 18W 1620lm