


## Disco LED

Jordi Miralbell, Mariona Raventós

1995

Wall lamps

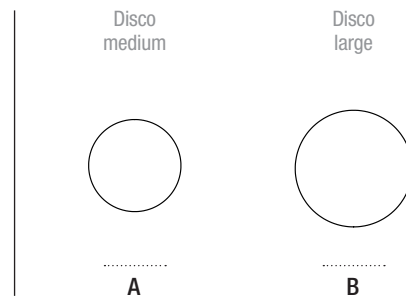

A steel disc hides the light source and diffuses it around the opaque circle. The light is reflected on the wall and creates a halo around the disc, rather like the luminescence of stars during an eclipse.

### GENERAL DESCRIPTION

Satin nickel structure and lampshade.  
Suitable for Outlet Box (UL market).

### LIGHT SOURCE

Light source included (adjustable).  
Module of LEDs  
Operating voltage: 220-240 Vac.  
(CE) / 120 Vac. (UL)  
Power system: 9 W  
T<sup>a</sup> Colour : 2.700 K  
CRI: 80  
Lifetime: 40.000 h

Built-in LED.  
Suitable for Phase Cut dimming  
systems. (External dimmer switch  
not included).  
Energy efficiency class (E.E.C):  
A++... A.  
Suitable only for indoor use.  
Always use this light source.

Input voltage : 220-240 Vac. (50 Hz / 60 Hz).  
According to destination.



## NORMATIVAS

CE



UNE-EN 60598  
UNE-EN 55015  
UNE-EN 60529  
UNE-EN 62031  
UNE-EN 61000-3-2  
UNE-EN 61347-2-13



Non-class 2  
Dry location only  
UL-1598  
UL-8750  
E-336377

## MAINTENANCE

Clean with a smooth cloth. Do not use ammonia, solvents or abrasive cleaning products.

## OTHERS

The lamp are delivered in one package.  
The assembly instructions are delivered with the product.

## MODELS

